

Product description


r.Ocean® is a family of products dedicated to the Marine and Offshore market. The product range includes products that come in various forms, having different densities of mineral wool used, and in variants with or without cladding. Depending on the end use, the products take the following form:

- lamella mat - **r.Ocean® LA**
- insulation lagging - **r.Ocean® PA, r.Ocean® PN**
- insulation board - **r.Ocean® BA, r.Ocean® BN**
- classic mat - **r.Ocean® MA**
- fitting - **r.Ocean® SA**

With such a wide range of products, it is possible to insulate most typical installations and technical equipment found on ships and offshore facilities. Each of the **r.Ocean®** products meets the IMO requirements specified in the Marine Equipment Directive 2014/90/EU (MED) and, with regard to fire protection, those specified in the Commission Implementing Regulation (EU) 2024/1975. Detailed properties and parameters are confirmed by the relevant certificates and approvals.

Documents and Classifications

Convention regarding fire protection	SOLAS 74 Reg. II-2/3, II-2/5, II-2/6, II-2/9, X/3	(r.Ocean® LA, r.Ocean® BA, r.Ocean® MA) (r.Ocean® PN, r.Ocean® BN) (r.Ocean® PA, r.Ocean® SA)
IMO requirements regarding marine safety	IMO Res.MSC.36(63)-(1994 HSC Code) 7, IMO Res.MSC.97(73)-(2000 HSC Code) 7, IMO Msc/Circ.1120, IMO Res.MSC.307(88)-(2010 FTP Code)	(r.Ocean® LA/BA/MA/PA/SA/PN/BN)
EC Production-Quality Assurance (Module D) Certificate No.	CW/MED/3/03/2024	(r.Ocean® LA/BA/MA/PA/SA/PN/BN)
Declaration of Conformity No.	DoC-ola-2025 DoC-opa-2025 DoC-oba-2025 DoC-osa-2025 DoC-oma-2025 DoC-opn-2025 DoC-obn-2025	(r.Ocean® LA3/LA5/LA8) (r.Ocean® PA3/PA5/PA8) (r.Ocean® BA3/BA5/BA8) (r.Ocean® SA3/SA5/SA8) (r.Ocean® MA3/MA5/MA8) (r.Ocean® PN3/PN5/PN8) (r.Ocean® BN3/BN5/BN8)
Hygienic Certificate No.	AH 80/322/80/2023 AH 81/322/81/2023	(r.Ocean® LA/BA/MA/PA/SA) (r.Ocean® PN/BN)



r.Ocean® LA (versions by density: LA3/LA5/LA8)

Mineral wool lamella mat with a cladding of reinforced aluminium foil.

Thickness: 20 - 100 mm, Length: 2,5 - 12 m, Density: 35 - 80 kg/m³.

Range of application

MED/3.18a – Surface finishing materials and fire-resistant floor coverings: decorative veneers

MED/3.18d – Surface finishing materials and fire-resistant floor coverings: pipeline insulation coverings

MED/3.18f – Surface finishing materials and fire-resistant floor coverings: flammable duct membrane

Certificates

EU-type Examination Certificate (Module B) No.	CW/MED/1/08/2025 Annex item: MED/3.18a CW/MED/2/08/2025 Annex item: MED/3.18d CW/MED/3/08/2025 Annex item: MED/3.18f
--	--

EC Production-Quality Assurance (Module D) Certificate No.	CW/MED/3/03/2024
--	-------------------------

Product Type Approval Certificate No.	TT/1318/710296/21 (Polish Register of Shipping) 68572/A0 BV (Bureau Veritas)
---------------------------------------	---

r.Ocean® PA (versions by density: PA3/PA5/PA8)

Mineral wool lagging with a cladding of reinforced aluminium foil.

Pipe diameter: 15 - 273 mm, Thickness: 20 - 120 mm, Length: 1,2 m, Density: 35 - 80 kg/m³.

Range of application

MED/3.18d – Surface finishing materials and fire-resistant floor coverings: pipeline insulation coverings



Certificates

EU-type Examination Certificate (Module B) No.	CW/MED/2/08/2025 Annex item: MED/3.18d
--	--

EC Production-Quality Assurance (Module D) Certificate No.	CW/MED/3/03/2024
--	-------------------------

Product Type Approval Certificate No.	TT/1319/710296/21 (Polish Register of Shipping) 68572/A0 BV (Bureau Veritas)
---------------------------------------	---



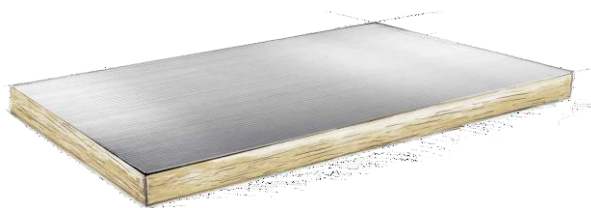

r.Ocean® BA (versions by density: BA3/BA5/BA8)

Mineral wool insulation board with a cladding of reinforced aluminium foil.

**Thickness: 20 - 300 mm, Density: 35 – 80 kg/m³,
Length: 1,2 or 2,4 m, Width: 0,6 or 1,2 m.**

Range of application

MED/3.18a – Surface finishing materials and fire-resistant floor coverings: decorative veneers

MED/3.18f – Surface finishing materials and fire-resistant floor coverings: flammable duct membrane

Certificates

EU-type Examination Certificate (Module B) No.	CW/MED/1/08/2025 Annex item: MED/3.18a
EC Production-Quality Assurance (Module D) Certificate No.	CW/MED/3/08/2025 Annex item: MED/3.18f
Product Type Approval Certificate No.	CW/MED/3/03/2024
Product Type Approval Certificate No.	TT/1322/710296/21 (Polish Register of Shipping)
Product Type Approval Certificate No.	68572/A0 BV (Bureau Veritas)

r.Ocean® PN (versions by density: PN3/PN5/PN8)

Mineral wool lagging without cladding.

**Pipe diameter: 15 - 273 mm, Thickness: 20 - 120 mm,
Length: 1,2 m, Density: 35 – 80 kg/m³.**


Range of application

MED/3.13 – Non-flammable materials

Certificates

EU-type Examination Certificate (Module B) No.	CW/MED/4/08/2025 Annex item: MED/3.13
EC Production-Quality Assurance (Module D) Certificate No.	CW/MED/3/03/2024
Product Type Approval Certificate No.	TT/1320/710296/21 (Polish Register of Shipping)





r.Ocean® BN (versions by density: BN3/BN5/BN8)

Mineral wool insulation board without cladding.

Thickness: 20 - 300 mm, **Density:** 35 – 80 kg/m³,
Length: 1,2 or 2,4 m, **Width:** 0,6 or 1,2 m.

Range of application

MED/3.13 – Non-flammable materials

Certificates

EU-type Examination Certificate (Module B) No	CW/MED/4/08/2025 Annex item: MED/3.13
EC Production-Quality Assurance (Module D) Certificate No.	CW/MED/3/03/2024
Product Type Approval Certificate No.	TT/1323/710296/21 (Polish Register of Shipping)



r.Ocean® MA (versions by density: MA3/MA5/MA8)

Classic mineral wool mat with a cladding of reinforced aluminium foil.

Thickness: 20 - 150 mm, **Density:** 35 – 80 kg/m³,
Length: 1,5 - 12 m, **Width:** 1,0 m.

Range of application

MED/3.18a – Surface finishing materials and fire-resistant floor coverings: decorative veneers

MED/3.18f – Surface finishing materials and fire-resistant floor coverings: flammable duct membrane

Certificates



EU-type Examination Certificate (Module B) No.	CW/MED/1/08/2025 Annex item: MED/3.18a CW/MED/3/08/2025 Annex item: MED/3.18f
EC Production-Quality Assurance (Module D) Certificate No.	CW/MED/3/03/2024
Product Type Approval Certificate No.	TT/1321/710296/21 (Polish Register of Shipping)





PRODUCT SHEET

r.Ocean®

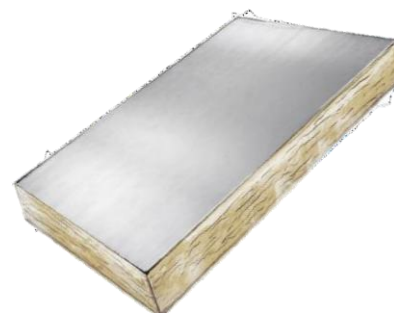

r.Ocean® SA (versions by density: **SA3/SA5/SA8**)

Mineral wool fitting with a cladding of reinforced aluminium foil.

**Thickness: 20 - 150 mm, Density: 35 – 80 kg/m³,
Format and shape: any.**

Range of application

MED/3.18d – Surface finishing materials and fire-resistant floor coverings: pipeline insulation coverings

Certificates

EU-type Examination
Certificate (Module B)
No.

CW/MED/2/08/2025 Annex item: **MED/3.18d**

EC Production-Quality
Assurance (Module D)
Certificate No.

CW/MED/3/03/2024

Product Type Approval
Certificate No.

TT/1324/710296/21 (Polish Register of Shipping)

ROHHE

ROHHE® Sp. z o.o.

05-555 Tarczyn, Al. Krakowska 19A
tel. +48 22 299 88 33, biuro@rohhe.pl, www.rohhe.pl